

Features

- Low latency and high throughput USB Host Controller from Renesas
- Low phase noise discrete Discroll-type crystal oscillator
- Ultralow voltage noise LDO regulator for oscillator circuitry and linear LDO for core voltage
- External direct +5V input for powering external USB peripherals
- Normal and low-profile brackets
- 3 years manufacturer's warranty

Components


- Renesas μ PD720202 USB 3.0 chipset
- LT3042 ultralow noise, ultrahigh PSRR RF linear regulator
- High-Q series resonance crystal
- 4 layer, high TG , improved FR4 PCB

Description

The APCIE2USB card is intended to apply in hi-end audio PC for USB audio playback. The low phase noise reference clock, the clean powering of the USB host controller chip and the external pure powering of the USB device guarantees accurate, smooth dataflow and audiophile sound quality.

Very carefully designed 4 layers improved FR4 printed circuit board (PCB) with surface mounted components ensure minimal signal path and optimal signal integrity.


Product photos (with low profile bracket)

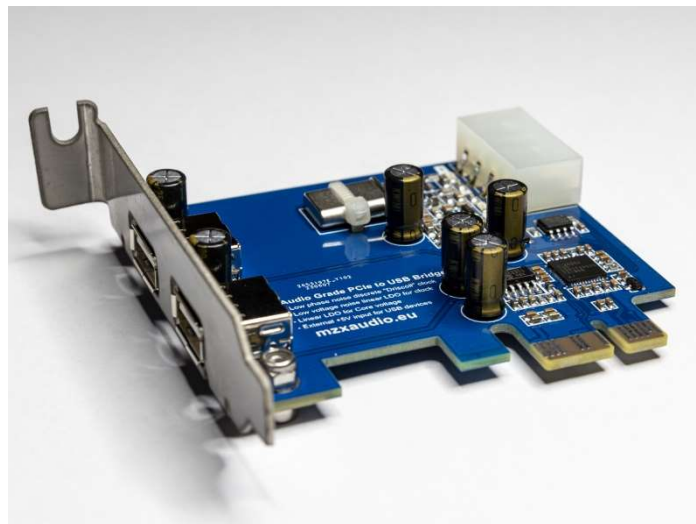

SPECIFICATION		
INPUT	PC bus connector	PCIe Gen2 x 1 Lane
	Power	MOLEX, Pin1=+12V (Clock, optional); Pin2-Pin3=GND; Pin4=+5V (USB)
OUTPUT	Connector	USB 2.0 Type A x 2
OTHERS	PCB Dimension	74 x 69 mm [Width x Height] without bracket
	Weight	TBD grams
ENVIRONMENT	Working temperature	-10 C° to +40 C°
	Working Humidity	20 to 90% RH, non-condensing
PACKAGING	Material	Corrugated paper and foam
	Box content	<ul style="list-style-type: none"> • APCLe2USB card equipped with normal bracket • Additional low-profile bracket
	Dimension	205 x 135 x 45 mm
	Weight	130 grams

Ordering code: APCLe2USB Card

Label



APCLe2USB Card
Audiophile PCIe 2 USB

USB Power: 5Vdc / 1.5A
CLK Power: 12Vdc / 50mA
BUS: PCIe Gen2 x 1 S/N: 3011
HW ver. 2023.1 Built: 2024.15.wk

